

# VERSALIFT

## VDTL-160-FZ

Pick-up mounted  
telescopic platform



Available for class B  
driving licence



LMC controls with  
variable outreach



Emergency lowering  
controls at the pedestal



Compact total  
installation height



1 kV certified low  
voltage insulation



# VERSALIFT

A **TIME** MANUFACTURING COMPANY

# VDTL-160-FZ - Ford Ranger



Emergency operation from ground  
(valve-bank mounted on pedestal)


Better performance (additional working  
height and outreach)

■ Length: 6620 mm ■ Height: 2665 mm ■ Wheelbase: 3270 mm



15,7 m 13,8 m 7,5/5,6 m 230kg 2-man ECO 140° LMC A-frame N/A 3.190 kg 45 kg\*\* 420° 3°/5° 1 kV

## Diagramme(s)

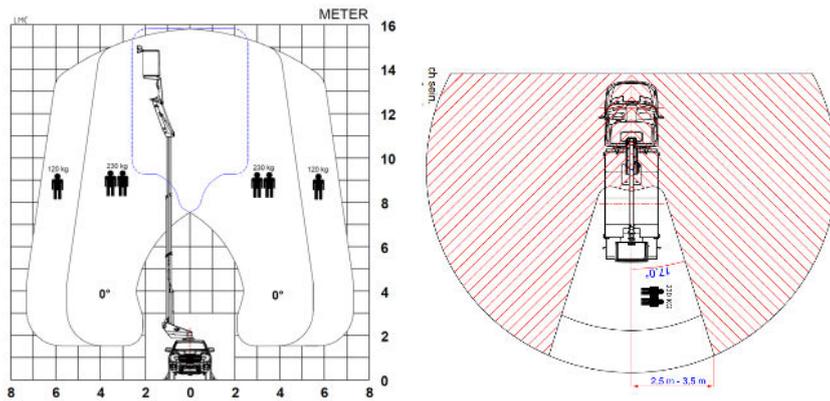

## Options

- Outrigger pads with holders
- Flashinglights on the roof
- Aluminium cabinets for the chassis
- Safety stripes (red/white)
- Tilt sensor
- Inverter
- Full Home function



Integrated control panel for  
Versalift in cabin



Aluminium cabinets for the  
chassis (option)



Big fiberglass toolbox  
across flatbed (option)



LMC (Load Moment Control)  
Variable outreach and up to  
2 actions at a time  
(1 per joystick)

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).

## Distributor

Versalift International  
Soendervang 3, 9640 Farsøe  
Denmark

+45 9863 2433  
sales@versalift.dk  
versaliftinternational.com