

# VERSALIFT

## V-170

Chassis mounted  
telescopic platform  
4x2



2 x 60° bucket rotation



3-stage telescopic  
boom



XPC controls with up to  
2 actions at a time



3.5 t GVW



Available for class B  
driving licence



# VERSALIFT

A **TIME** MANUFACTURING COMPANY

# V-170 on MB Sprinter




High-performance telescopic lift that comes with automatic stabilization as standard

Incredible max outreach of 10 meter in full working diagram (420°)


3°/5° outrigger levelling ability

Ample spare payload to install additional Versalift hybrid system, the e-Tech lithium battery pack system.

■ Length: 6775 mm ■ Height: 3010 mm ■ Wheelbase: 3665 mm

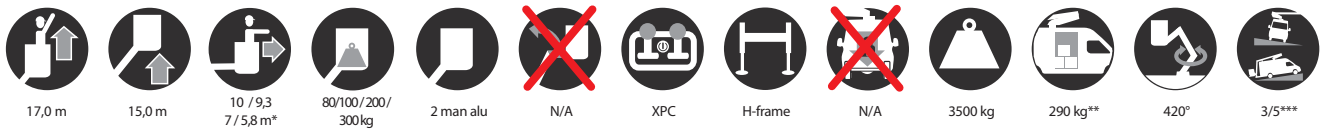


## Diagramme(s)

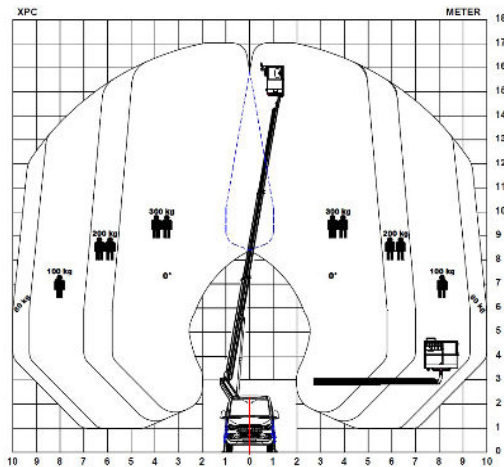


## Options

- Electric emergency pump
- Lithium-Ion power pack
- Flash on outrigger
- Flash on turret
- Footplates w. holder
- 230V outlet in bucket
- Fiberglass bucket (1kV)



Maximum bucket capacity of 300 kg.

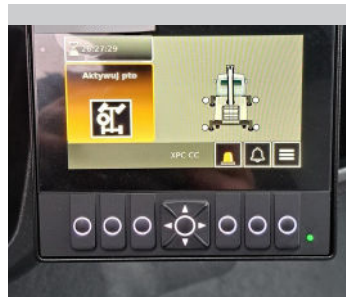

Outrigger setup from inside the cabin



Automatic outrigger setup and packing



Lithium-Ion power pack (optional)

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver and a full tank of fuel (220 kg added to the installation weight).

\*\*\* Depending on the vehicle position

## Distributor

Versalift International  
Soendervang 3, 9640 Farsoe  
Denmark

+45 9863 2433  
sales@versalift.dk  
versaliftinternational.com

# VERSALIFT

## V-170

Chassis mounted  
telescopic platform  
Off-road 4x4



2 x 60° bucket rotation



3-stage telescopic  
boom



XPC controls with up to  
2 actions at a time



3.5 t GVW



Available for class B  
driving licence



# VERSALIFT

A **TIME** MANUFACTURING COMPANY

# V-170 on MB Sprinter




High-performance telescopic lift that comes with automatic stabilization as standard

Incredible max outreach of 10 meter in full working diagram (420°)


3°/5° outrigger levelling ability

Ample spare payload to install additional Versalift hybrid system, the e-Tech lithium battery pack system.

■ Length: 6769 mm ■ Height: 3090 mm ■ Wheelbase: 3665 mm

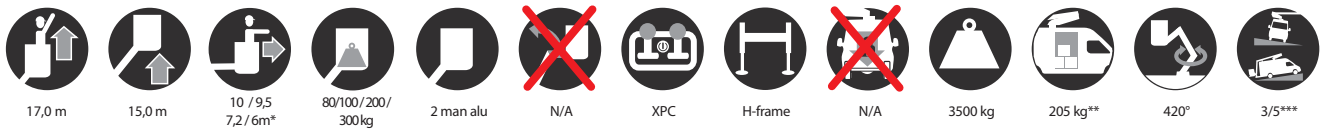


## Diagramme(s)

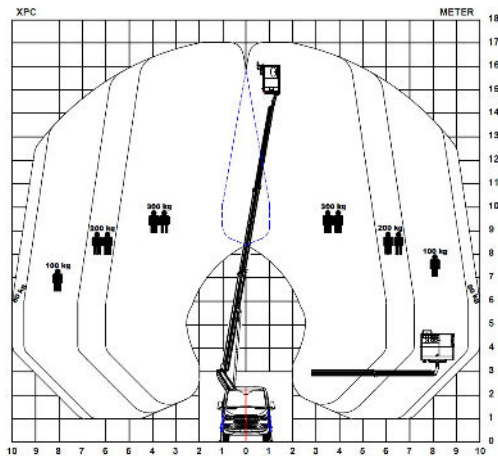

## Options

- Electric emergency pump
- Lithium-Ion power pack
- Flash on outrigger
- Flash on turret
- Footplates w. holder
- 230V outlet in bucket
- Fiberglass bucket (1kV)



Maximum bucket capacity of 300 kg.



Outrigger setup from inside the cabin



Automatic outrigger setup and packing



Lithium-Ion power pack (optional)

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver and a full tank of fuel (220 kg added to the installation weight).

\*\*\* Depending on the vehicle position

## Distributor

Versalift International  
Soendervang 3, 9640 Farsoe  
Denmark

+45 9863 2433  
sales@versalift.dk  
versaliftinternational.com

# VERSALIFT

## V-170

Chassis mounted  
telescopic platform



2 x 60° bucket rotation



3-stage telescopic  
boom



XPC controls with up to  
2 actions at a time



3.5 t GVW



Available for class B  
driving licence



# VERSALIFT

A **TIME** MANUFACTURING COMPANY

# V-170 on Iveco Daily




High-performance telescopic lift that comes with automatic stabilization as standard

Incredible max outreach of 10 meter in full working diagram (420°)


3°/5° outrigger levelling ability

Ample spare payload to install additional Versalift hybrid system, the e-Tech lithium battery pack system.

■ Length: 6670 mm ■ Height: 2940 mm ■ Wheelbase: 3750 mm

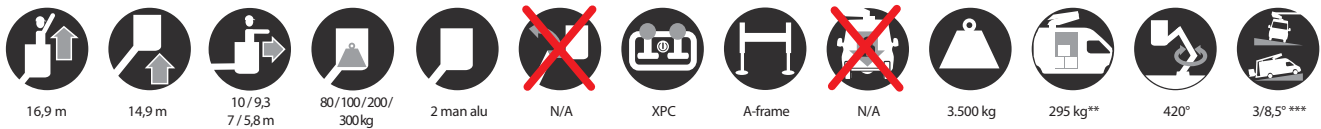


## Diagramme(s)

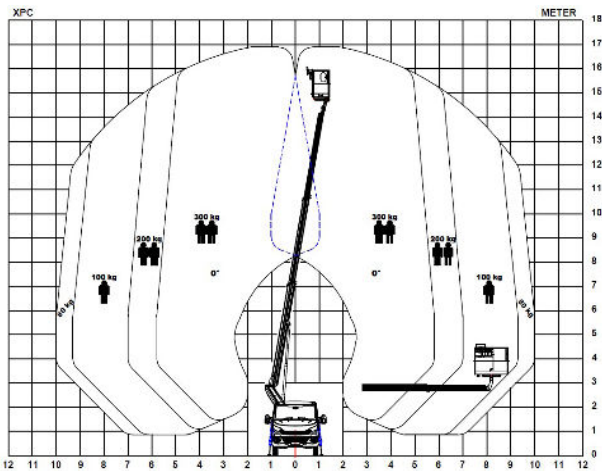


## Options

- Electric emergency pump
- Lithium-Ion power pack
- Flash on outrigger
- Flash on turret
- Footplates w. holder
- 230V outlet in bucket
- Fiberglass bucket (1kV)



Maximum bucket capacity of 300 kg.

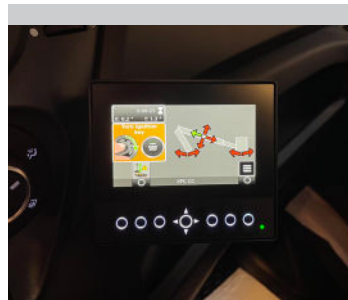

Outrigger setup from inside the cabin



Automatic outrigger setup and packing



Lithium-Ion power pack (optional)

## Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

\* Depending on the vehicle.

\*\* Max payload with a driver and a full tank of fuel (220 kg added to the installation weight).

\*\*\* Depending on the vehicle position

## Distributor

Versalift International  
Soendervang 3, 9640 Farsoe  
Denmark

+45 9863 2433  
sales@versalift.dk  
versaliftinternational.com